



✓ Applications

Range of Dead weight tester is designed to test, adjust and calibrate measuring instruments, mechanical or electronic pressure by comparison (pressure gauges, pressure transmitters or sensors or switches)

They consist of a pressure generator connected to a compressed air source, a piston / cylinder unit, a set of identified masses. The capstan can adjust the pressure by the gas through the piston. This pressure is balanced by the piston / cylinder which compares the instrument to calibrate the values of pressures generated by the standard. These scales are intended for pressure calibration on.

The Dead weight are robust and easy to use and have a high long-term stability

✓ Technical specifications

- **Calibration :** It is necessary to recalculate the pressure generated by the dead weight according to the different variables. Our dead weight are calibrated in the following terms of use :
Temperature 20°C - Pressure atmos. 1013.25 hPa - Humidity 50% - acceleration 9.80665 m/s²
- **Fluid :** The system of automatic lubrication integrated into the dead weight avoids the risks of contamination piston/cylinder. Colorless, compatible mineral oil with medical or food uses - volume of the reservoir 20 cm³
- **Source Pressure :** Dry air - gas connection ¼ cylindrical female - This balance needs to be connected to a pressure source.
- **Check/adjust the seat :** leveling bubble and adjustable feet
- **Connection for the instrument to be tested :** swivel G1/2 standard
- **Rotating weigh :** Training masses : manual rotation
- **Carter :** Light alloy aluminium AG3 + high-resistance paint
- **Ratchet :** removable for transport
- **Piston/cylinder :** Single piston treated - **Répeatability** : 3.10⁻⁵ - **Sensitivity** : 1.10⁻⁵ - **Precision dead weight** : 10⁻⁴
- **Weight :** corrosion treated steel - **Weight** of the set of weights from 4 kg to 48 kg depending on model – Shape masses ergonomic, easy loading of the masses on the bell - **Marking** corresponding with the measuring unit (bar, mbar, KPa, PSI etc..)


✓ Specific Model

- **Model :** BA2-120B - dead weight simple piston
- **Measuring range :** 1 to 120 bar / 10 to 1600 PSI / 100 to 12000 kPa
- **Accuracy dead weight :** 0.0010 + (1.10⁻⁴ x P) (with P en bar)
- **Weight dead weight without weight :** 18 kg
- **Typical cross-section of the piston :** 39.2280 mm²
- **Material piston/cylinder :** stainless steel
- **Number of piston :** 1

✓ Various

- **Manuel :** a detailed operating instructions supplied with the device + Certificate + 0.5 liter of oil
- **Maintenance :** Our technical department is at your disposition for the revision, calibration or service your unit – Calibration device recommended every 2 years

✓ Dimensions of device

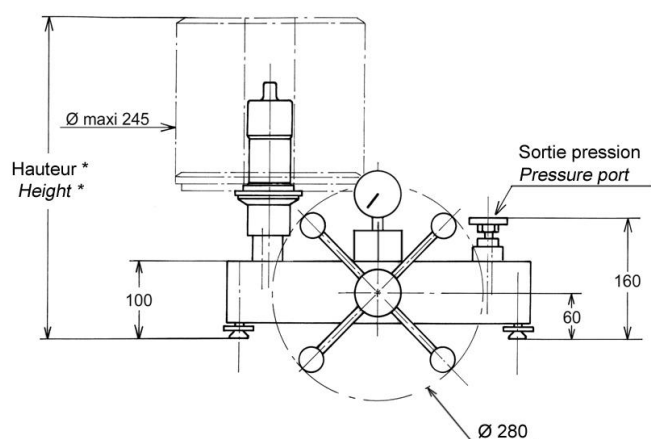

Height with standard set of weight : (bar, kPa) : 411 mm (PSI) : 386 mm

Unit used : mm

✓ Standard weight sets and intermediate (for other units contact us)

Standard set			
Unit : BAR (Ref. MB0001)	Pressure (bar)	Total weight	Typical value (g)
	20	4	8000
	19	1	7600
	10	1	4000
	4	2	1600
	2	1	800
	1	1	400
	Initial Pressure bell + weight adaptation	1	400
TOTAL		120	±48 kg

Intermediate set			
BAR (Ref. MB0002)	Pressure (bar)	Total weight	Typical value (g)
	0.4	2	160
	0.2	1	80
	0.1	1	40
	0.04	2	16
	0.02	1	8
TOTAL		1.2	480 g


Standard set			
Unit : PSI (Ref. MB0013)	Pressure (PSI)	Total weight	Typical value (g)
	200	6	5520
	190	1	5244
	100	1	2760
	40	2	1104
	20	1	552
	10	1	276
	Initial Pressure bell	10	276
TOTAL		1600	±44 kg

Intermediate set			
PSI (Ref. MB0016)	Pressure (PSI)	Total weight	Typical value (g)
	4	2	110.6
	2	1	55.2
	1	1	27.6
	0.04	2	11
	0.02	1	5.5
TOTAL		12	331.5 g

Standard set			
Unit : kPa	Pressure (Kpa)	Total weight	Typical value (g)
	2000	4	8000
	1900	1	7600
	1000	1	4000
	400	2	1600
	200	1	800
	100	1	400
	Initial Pressure bell + weight adaptation	100	400
TOTAL		12000	±48 kg

Intermediate set			
kPa	Pressure (Kpa)	Total weight	Typical value (g)
	40	2	160
	20	1	80
	10	1	40
	4	2	16
	2	1	8
TOTAL		120	480 g

✓ Options for weight set



transport metal boxes

(OP0101) : 260 x 260 x 310 mm - weight empty : 6 kg

Suitcase for post planning and shipping

(OP0095) small : 280 x 250 x 280 mm - weight empty : 5 kg

(OP0099) large : 500 x 350 x 280 mm - weight empty : 11 kg

Useful for BA2-120B : Consult us ! (varies according units)

✓ Options

- Weight set additional base for different units
- Adjust the dead weight with a different acceleration of 9.80665 m/s^2 on request
- Calibration of the instrument : Points statement AREMECA or certificate of calibration DAkkS or COFRAC
- Degreasing oxygenates optional (consult us)
- kit motorization and visualization

✓ Shipping and packaging

- **Packaging** : woodpack is provided for the shipping

Designation/Reference	Dimension / carton or shipping crate	Weight empty / total weight (packaging + materiel)
Dead weight without weight	470 x 470 x 240 mm	Carton empty 1.5 kg Total weight ± 20 kg
Standard weight set	300 x 300 x 170 mm	Carton empty 1.5 kg Total weight ± 51 kg
Wood packaging SB0002	790 x 480 x 340 mm	Suitcase empty 20 kg Total weight ± 90 kg (dead weight + weight set + packaging)



SB0002

- **Note** : shipping is extra.

✓ Other models available in the range BA2

(Datasheet is available on request)

Models simple piston

Models	Accuracy	Measuring range		
		Bar ou kg/cm^2	PSI	kPa
BA2-200B	10^{-4}	2.5 to 200	25 to 3000	250 to 20000
BA2-60B	10^{-4}	0.5 to 60	5 to 800	50 to 6000
BA2-10B	10^{-4}	0.15 to 10	2.5 to 150	15 to 1000
BA2-1B	10^{-4}	15 mbar to 1 bar		1.5 to 100
BA2-1VB	10^{-4}	-15 mbar to -900 mbar		-1.5 to -90

✓ Accessories (Ask for our specific documentation)

- Accessory case (ref.OP0057)
- Setting gauge kit (ref.OP0125)
- Case connectors M (ref.OP0174) – Case connectors G (ref.OP0171) - Case connectors NPT (ref.OP0172) - Case connectors BSP-TR (ref.OP0173) - Case with 17 connectors M + G + NPT + BSP-TR (ref.OP0037) – unit connector (consult us)
- Carrying case for dead weight (ref.OP0002)